




# Mechanical HPCFRTC2 & HPCFRNC2

## Rotary Dampers

Body: Polycarbonate plastic

Gear: Polyacetal Plastic

Bi - Directional & Uni - Directional Fluid: Silicone

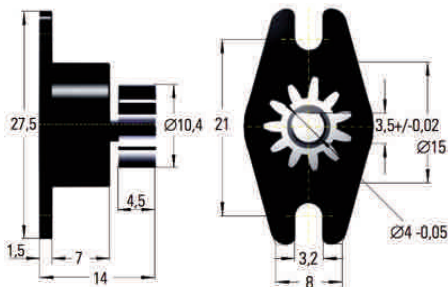

Material: polycarbonate plastic  
Temperature range: 0° C to 50° C

Tooth: Involute  
Module: 0.8  
Pressure angle: 20°  
Number of teeth: 11  
P.C.D.: 8.8 mm

0.8 mod matching plastic racks available up to 1 metre. Units are supplied with removable gear.

0.8 mod flexible racks available up to 2 metre.

### DISCOUNTS

Quantity	List Price
1 - 24	
25 - 49	-15%
50 - 99	-25%
100 - 249	-35%
250 - 499	-50%
500 +	-60%

PART NUMBER			Damping Torque Nm (Nom. 20 rpm. 23° C)	Price Each 1-24
Bi-directional damping	R-hand damping (clockwise)	L-hand damping (anti-clockwise)		
HPCFRTC2201G1			2 ± 0.6	£12.02
HPCFRTC2301G1			3 ± 0.8	£12.02
	HPCFRNC2R201G1	HPCFRNC2L201G1	2 ± 0.6	£14.30
	HPCFRNC2R301G1	HPCFRNC2L301G1	3 ± 0.8	£14.30